

Specifications

Floor Area: 1,670sqm

Floor Loading: 7.5 KPA


The asphalt surface is designed mainly for Pedestrian usage but can have infrequent Vehicle usage (cars/vans up to two (2) tonnes

Roof: The structure can carry a point load of 100kg can be applied to the columns if required

Note: For any requirements that exceed these, please speak with our team as alternative arrangements may be able to be facilitated

Key

-  Extinguisher
-  Fire Hose Reel
-  Outlet 240 10amp type
-  Outlet 3 phase
-  Cold Water Point
-  Venue Exit

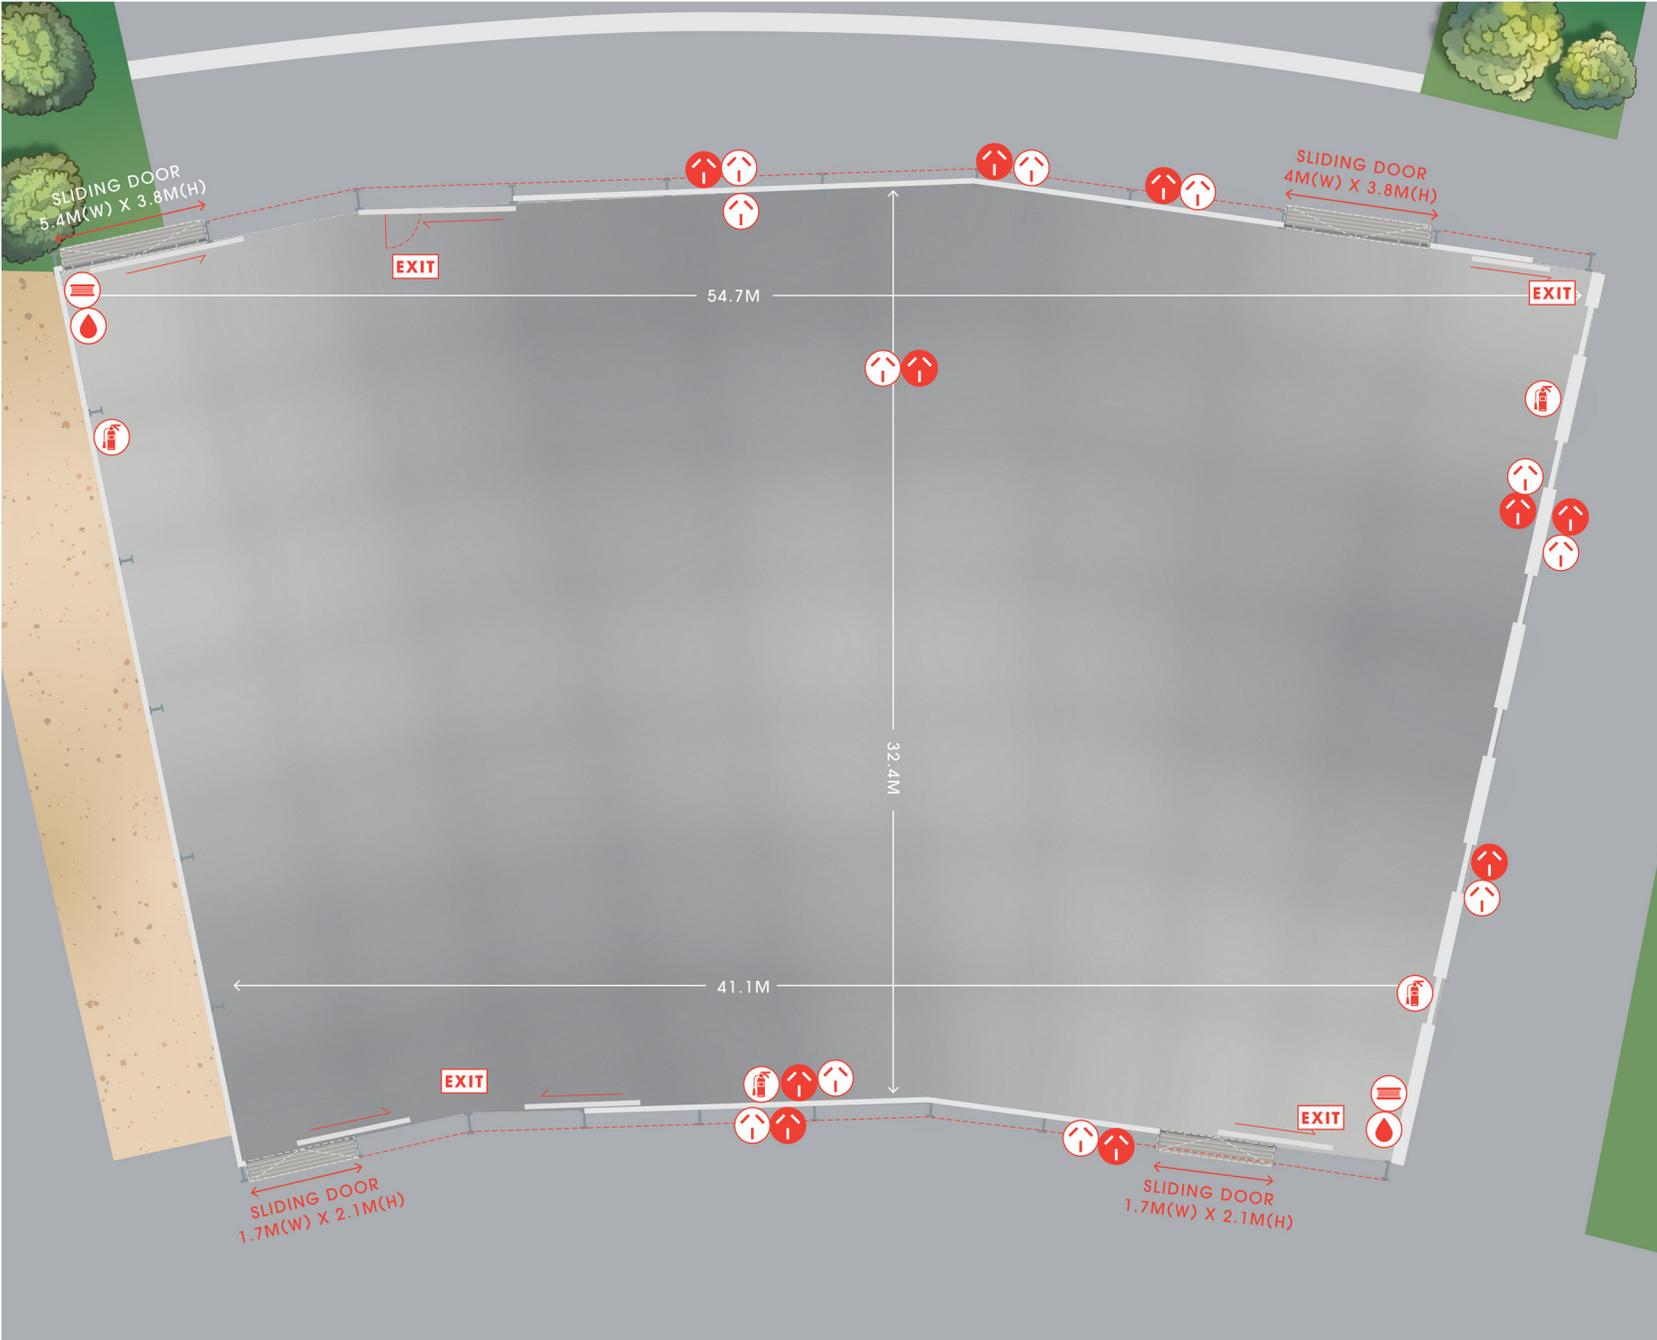

Building 16 Meaklim Pavilion

Disclaimer: This drawing is a representation only, Royal Melbourne make no representations about the accuracy of the information contained herein, not for construction or event build purposes. All measurements & equipment need to be checked on site. Do not scale. If in doubt, consult the Duty engineer or Operations Manager.

Copyright: All rights reserved. This work is copyright & cannot be reproduced or copied in any form or by any means (graphic, electronic or mechanical, including photocopying) without the written permission of the content provider. Any licence, expressed or implied, to use this document for any purpose whatsoever is restricted to the terms of the agreement or implied agreement between the content provider and the instructing party.