










FLOOR AREA: 1,790 SQM
LOADING:
FLOOR: 7.5 kpa
 THE SLAB CAN HAVE A MAXIMUM LOAD OF FOUR (4) TONNES (CAR/VAN/TRUCK).
ROOF: THE ROOF STRUCTURE CAN SAFELY CARRY A POINT LOAD OF 100kg. POINT LOAD NOMINATED ABOVE 100kg, CAN BE APPLIED DIRECTLY TO THE COLUMNS IF REQUIRED


SUPPLY CAPACITY: DB-N4.1 250A

BUILDING SPECIFICATIONS FOR B-13 (FORMALLY N-4)
 AS SUPPLIED BY DARYL JACKSON ARCHITECTS 14-07-2006

- SERVICES**
- DB OR COMMS. RACK 
 - OUTLET 240 10 AMP TYP. 
 - OUTLET 3 PHASE 
 - FIRE HOSE REEL 
 - EXTINGUISHER 
 - COLD WATER POINT 
 - SEWER OUTLET 
 - VENUE EXIT 
 - DEFIBRILLATOR 

AREAS TO BE KEPT CLEAR

NO BUILD ZONE 

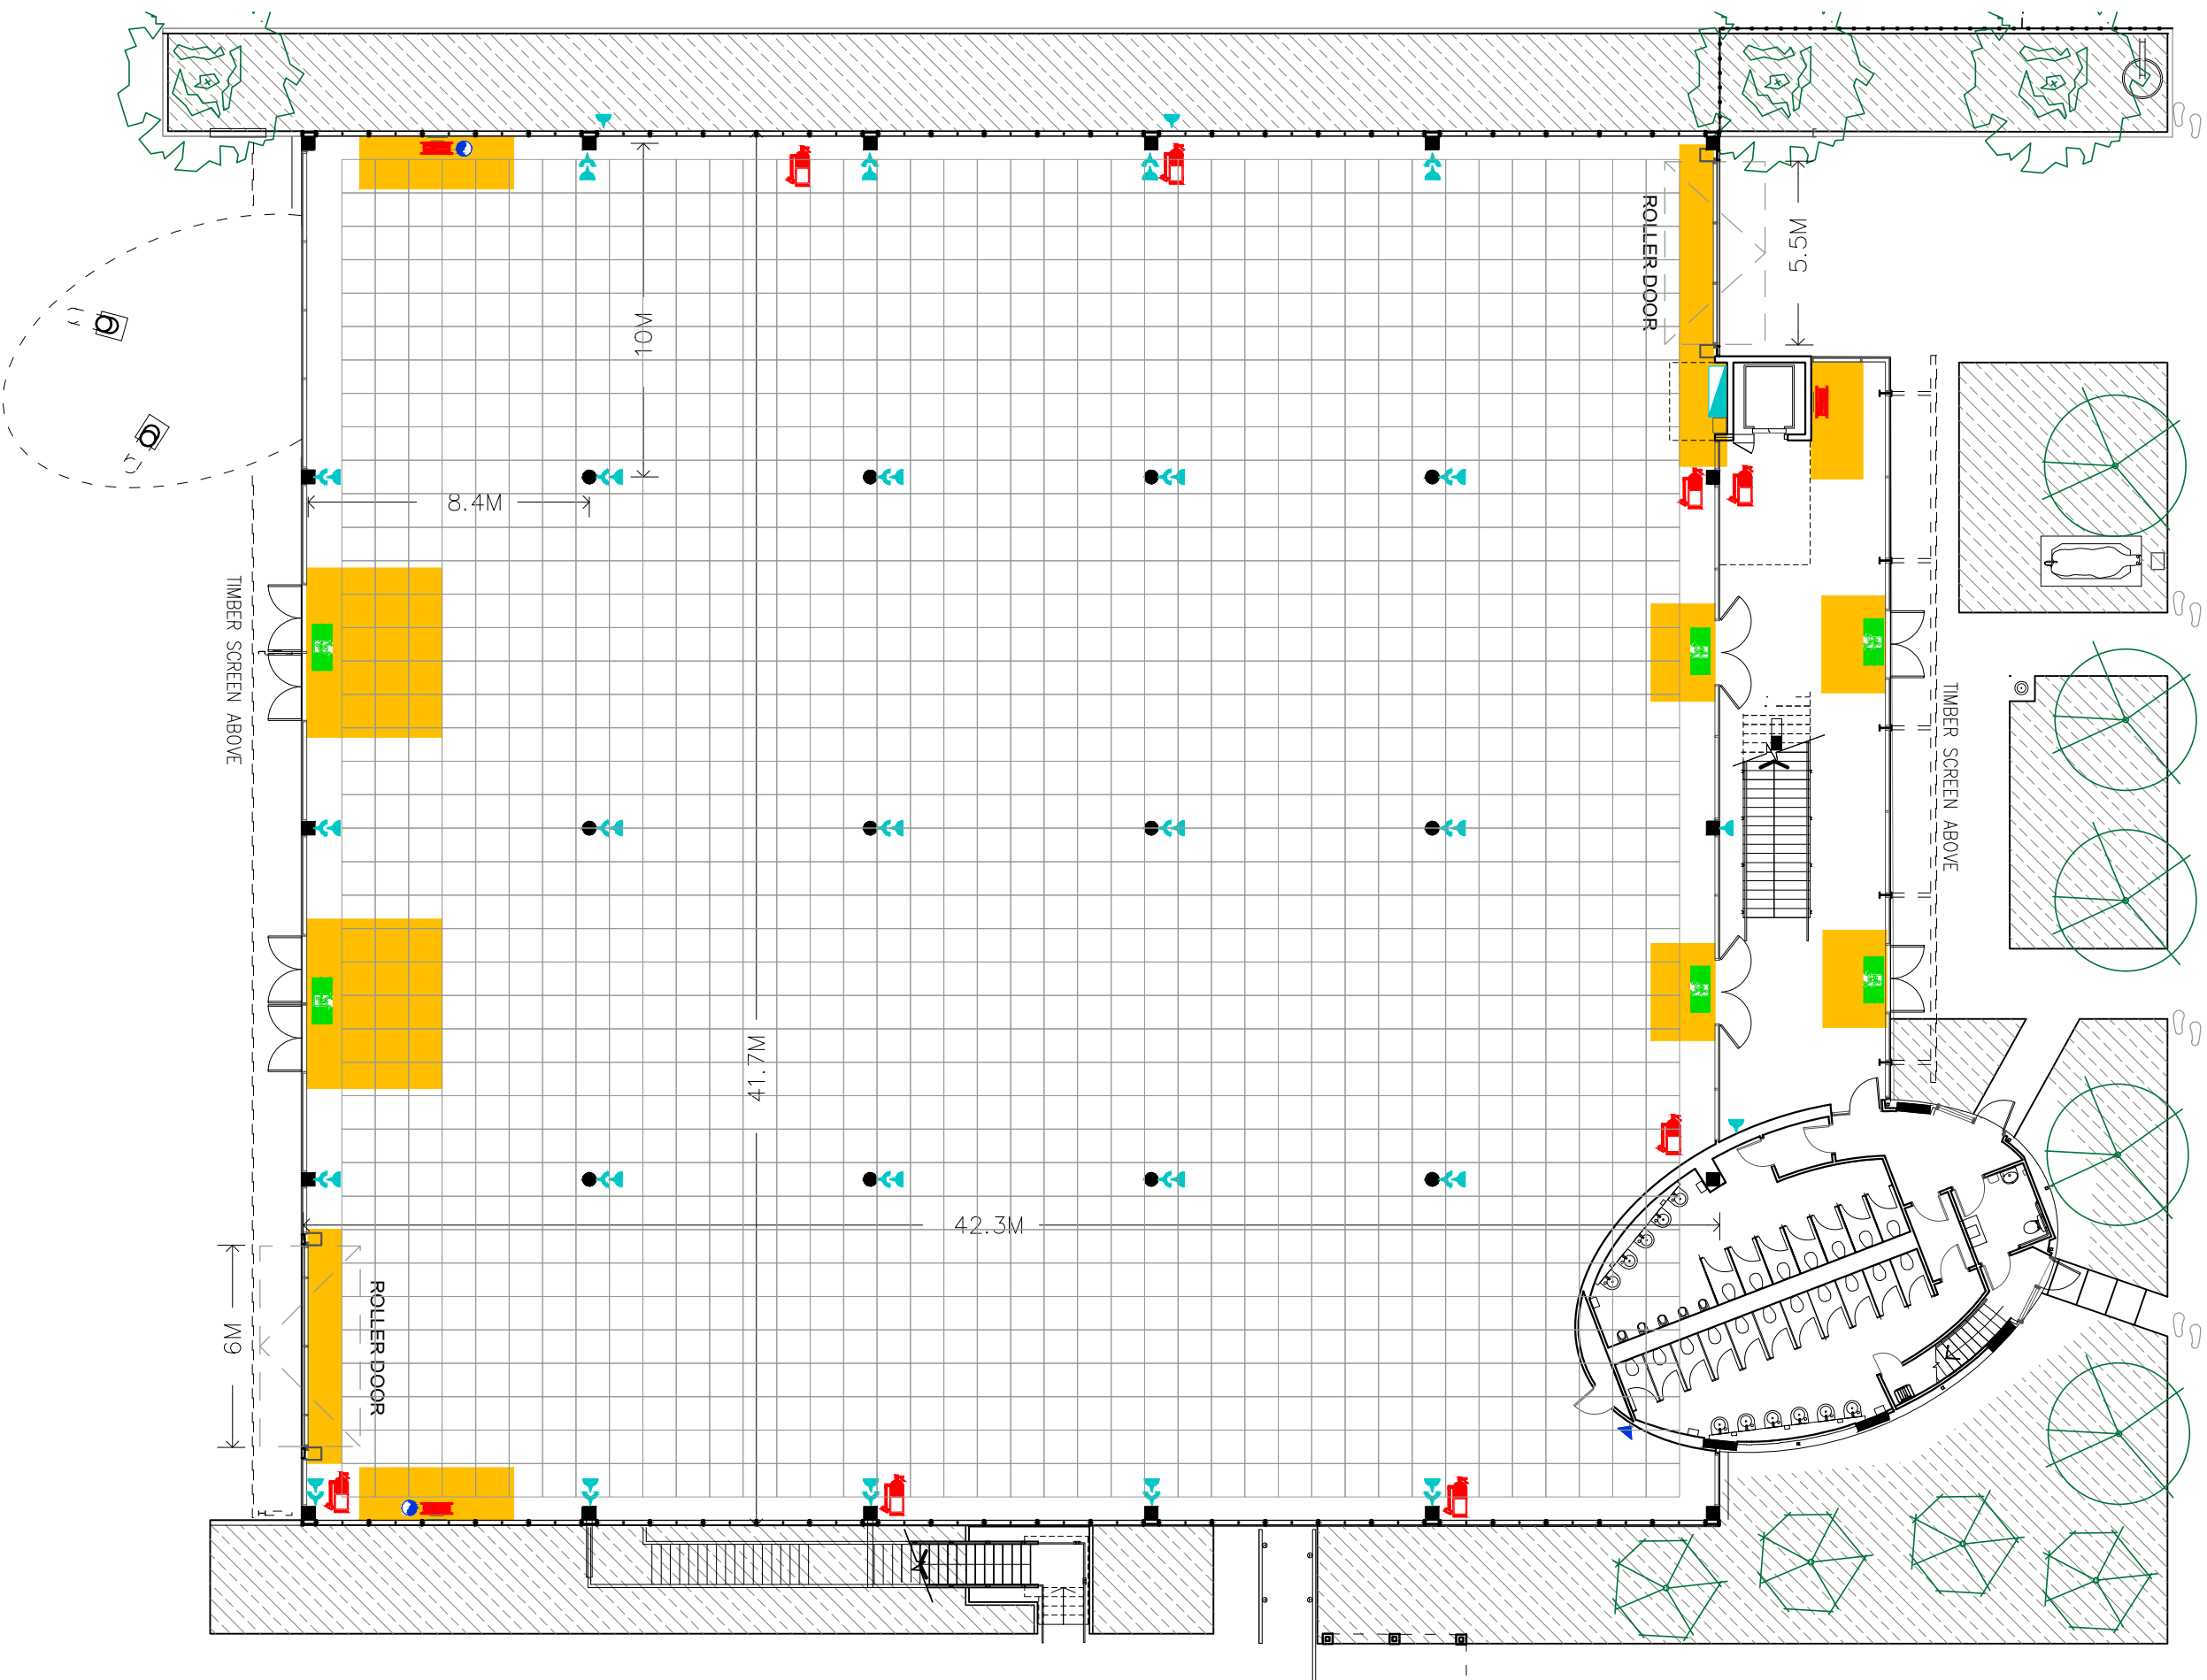

Disclaimer
 This drawing is a representation only. Royal Melbourne make no representations about the accuracy of the information contained herein, not for construction or event build purposes. All measurements & equipment need to be checked on site. Do not scale. If in doubt, consult the Duty engineer or Operations Manager.

Copyright
 All rights reserved. This work is copyright & cannot be reproduced or copied in any form or by any means (graphic, electronic or mechanical, including photocopying) without the written permission of the content provider. Any licence, expressed or implied, to use this document for any purpose whatsoever is restricted to the terms of the agreement or implied agreement between the content provider and the instructing party.

